ADJUSTAKLIP™ L-RAIL
ADJUSTABLE CLADDING SUPPORT RAIL

APPLICATION

The L-Rail can be installed vertically or horizontally onto the ADJUSTAKLIP™ bracket, with adjustability of up to 1.50". Façade panels, or secondary rails, may be directly attached to the L-Rail. Maximum supported weight and wind pressures will vary depending upon the spacing of the rail and type of back-up wall to which the ADJUSTAKLIP™ bracket attaches to.


L-RAIL PROPERTIES

SERIES		A1	A2	A3	A4
DEPTH		1.5625"	2.5625"	2.25"	3.25"
WEIGHT (LBS/FT)	16-GA	0.64	0.85	0.79	1.00
	14-GA	0.78	1.05	0.97	1.24


MATERIAL PROPERTIES & OPTIONS

MATERIAL TYPE		ASTM A1046 ZM40 Steel or 304 Stainless Steel*
DESIGN STEEL THICKNESS	16-GA	0.0579 inches
	14-GA	0.078 inches
MIN. STEEL THICKNESS	16-GA	0.055 inches
	14-GA	0.074 inches
YIELD STRESS, Fy		50 ksi
AVAILABLE FINISHES		Standard Mill or Black PVDF**
STANDARD LENGTH		96 inches

Properties are for ZM40 steel products only, contact KWS for stainless steel.
*Asterisk identifies non-standard items - availability & additional cost vary.
**Asterisk identifies only 16 GA rails are available with Black PVDF finish.
All dimensions & weights are nominal.
Black coated components are only coated on one side; opposite side is primed.
Contact KWS to confirm availability - most standard items typically ship within two weeks (quantity dependent).
See system specific guide details for further information on design, detailing and installation.

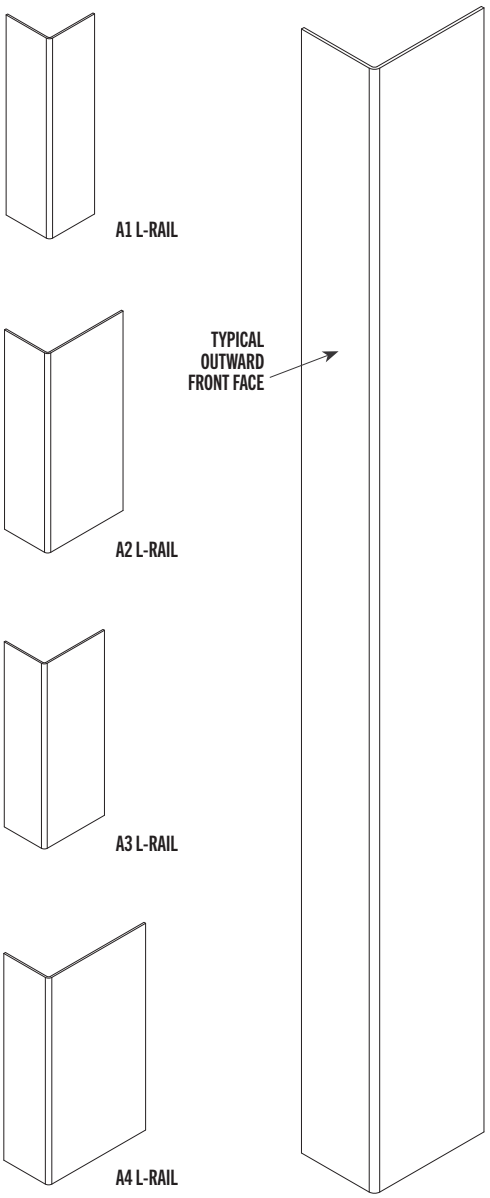

PRODUCT SPECIFICATIONS

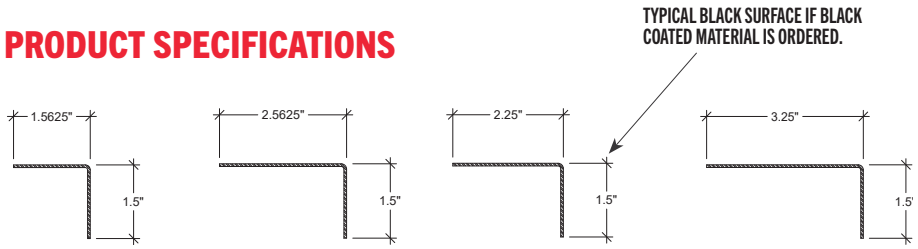

A1 L-RAIL A2 L-RAIL A3 L-RAIL A4 L-RAIL

NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR ANY APPLICABLE WRITTEN WARRANTIES SPECIFICALLY PROVIDED BY KNIGHT WALL SYSTEMS®. ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from any patent owned by KNIGHT WALL SYSTEMS® or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use. They are not guaranteed in any way by the Knight Wall Systems, Inc. since building design, engineering, and construction, including workmanship and materials are beyond the control of the manufacturer. The information provided here is subject to change without notice.

All content included on this document is and shall continue to be the property of Knight Wall Systems, Inc. or its content suppliers, and is protected under applicable copyright, trademark, and other proprietary rights. KNIGHT WALL SYSTEMS, the Knight Wall Systems design mark, KWS, ANKIT, CI, CI-Girt, FORMED TO PROTECT WHAT MATTERS MOST, INSULKEY, MFI, MOVEKLIP, PANELRAIL, TERMGIRT, THERMABRACKET, THERMASTOP, and THERMAZEE are registered trademarks controlled by Knight Wall Systems, Inc. Patent information: knightwallsystems.com/patents. This list is not exhaustive and Knight Wall Systems does not waive its rights in regard to other patents or trademarks that are not listed.
© 2026 Knight Wall Systems, Inc. All rights reserved. 11032026